


# Bright Green Low Power LED Tape

Bright Green Low Power LED Tape is a high quality flexible LED strip, the LEDs are strictly bin controlled for consistent colour temperature.

All versions of the tape use high quality 3M self-adhesive backing. The IP65 version of the tape has a high quality polyurethane coating, ensuring that the tape does not go brittle or discolour.

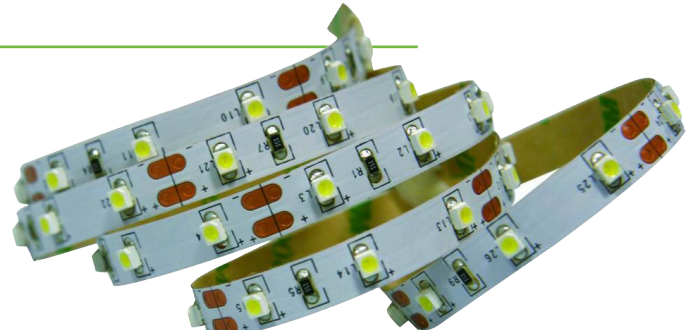


## Product Range

Product code	Colour	Colour/ wave*	Lumens/ metre	IP rating	Watts/ metre	LEDs/metre	LED chip
FL-LPCW-20	Cool white	6000K	420	20	4.8W	60	SMD 3528
FL-LPWW-20	Warm white	3000K	420	20	4.8W	60	SMD 3528
FL-LPR-20	Red	620nm	-	20	4.8W	60	SMD 3528
FL-LPG-20	Green	515nm	-	20	4.8W	60	SMD 3528
FL-LPB-20	Blue	465nm	-	20	4.8W	60	SMD 3528
FL-LPCW-65	Cool white	6000K	420	65	4.8W	60	SMD 3528
FL-LPWW-65	Warm white	3000K	420	65	4.8W	60	SMD 3528
FL-LPR-65	Red	620nm	-	65	4.8W	60	SMD 3528
FL-LPG-65	Green	515nm	-	65	4.8W	60	SMD 3528
FL-LPB-65	Blue	465nm	-	65	4.8W	60	SMD 3528

\* Typical values

## Dimensions

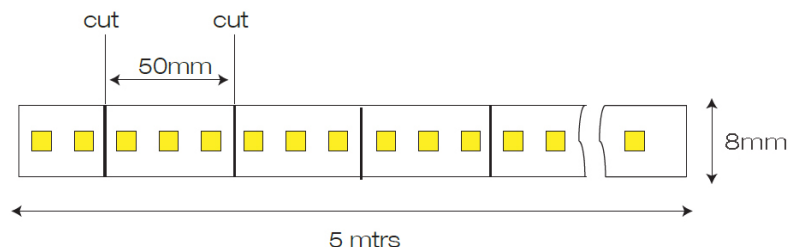

Tel +44 (0) 1932 355221 Email [info@brightgreentechnology.com](mailto:info@brightgreentechnology.com)  
 Find out more at [www.brightgreentechnology.com](http://www.brightgreentechnology.com)  
 or buy online at [www.brightgreendirect.com](http://www.brightgreendirect.com)

© 2014 Bright Green Technology Limited



# Bright Green Low Power LED Tape

## Electrical Connection

Connect to a 12 Volt power supply in maximum 5 metre lengths

## Operation Notes

Operating temperature range: -20° to 45° C.

## Connection

Installation should be carried out by suitably qualified personnel.

